

# CS0032 (1/3M1)

## Technical Datasheet



### Features

- Cable connection for powering military devices

### Applications


- Covert operations
- Homeland Security
- Surveillance

### Technical Specifications

<b>Part No.</b>	CS0032
<b>NSN</b>	6135-99-225-7255
<b>Voltage Range</b>	10.5 to 14.4V
<b>Average Voltage</b>	11 to 12V
<b>Nominal Capacity</b>	80Ah
<b>Max. Discharge</b>	5.0A continuous
<b>Pulse Capability</b>	N/A
<b>Weight</b>	3.3kg max.
<b>Operating Temperature</b>	0°C to 40°C
<b>Storage Temperature</b>	-32°C to 70°C
<b>Exterior/Housing</b>	Moulded ABS case
<b>Terminals/Connector</b>	Amphenol 629B-56T-08-33-SN
<b>Safety</b>	Polyswitch Material Safety Datasheet - MSDS095 Safety Guide UBM-5135
<b>Transportation</b>	Class 9 - U.S. and International (see note)
<b>Export License</b>	ECCN 3A611.x export license required to export from U.S.
<b>Harmonized Tariff Schedule</b>	8506.50.0000

**Note** A complete description of transportation regulations, lithium weights and transportation classifications is available on the Ultralife website.

## Dimensions

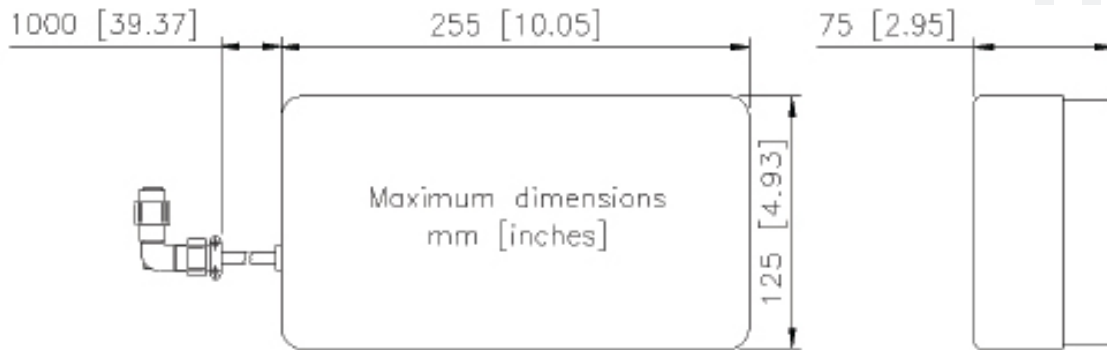

## Performance Graphs

